


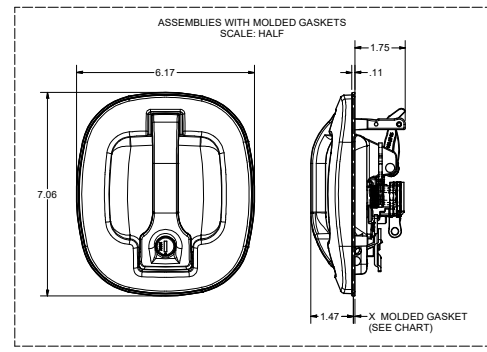
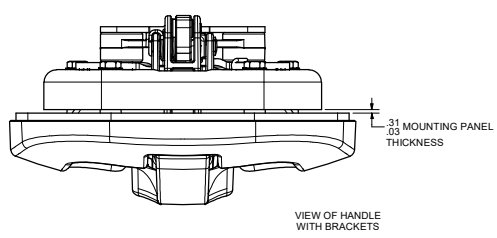
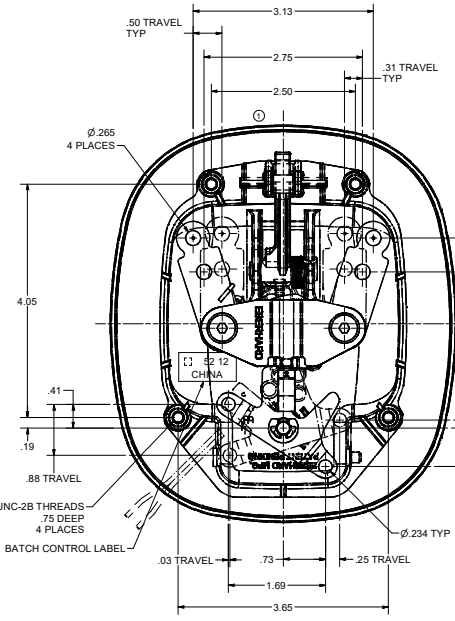


CONFIDENTIAL NOTICE: This drawing and the design, specifications and engineering information contained herein are the property of Eberhard Manufacturing Company and are not to be distributed or reproduced without express written consent of the Company. It is intended for use only for the purposes stated herein. It is not to be used for any other purpose. It is not to be used for any other purpose. It is not to be used for any other purpose.

REVISION HISTORY					
REV	DESCRIPTION	EN	DATE	REV BY	APVD BY
1	RELEASED: DP1187 REV E		09/15/2019	MMH	LSW
1	PIN INSTALLED PER PP11636 REV. G		06/73	10/14/2022	DJK MR

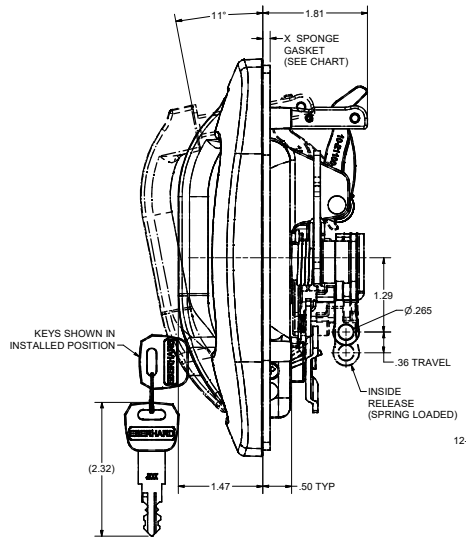


NOTE:  
MOUNTING BRACKETS AND (4) MOUNTING  
SCREWS  
SHIPPED LOOSE IN A SECURED POLY BAG.

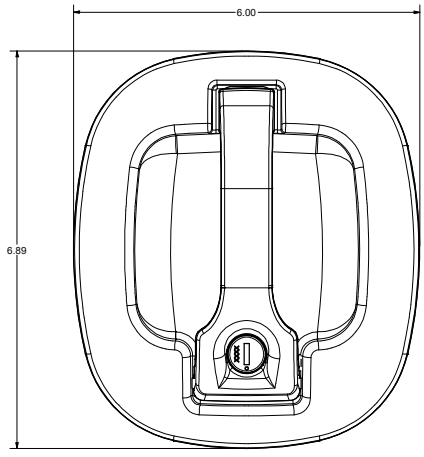

- NOTES:
- 1) FINISH AVAILABLE:  
A) CHROME RECEPTACLE & HANDLE, FC (03)  
B) BLACK POWDER (POLY SEMI-GLOSS) RECEPTACLE & HANDLE, FC (30)  
C) BLACK POWDER (POLY SEMI-GLOSS) RECEPTACLE & CHROME HANDLE, FC (31)  
D) BLACK POWDER (TEXTURED) RECEPTACLE & HANDLE, FC (42)  
E) BLACK POWDER (TEXTURED) RECEPTACLE & CHROME HANDLE, FC (35)
  - 2) LUBRIPATE AERO OR EQUIVALENT GREASE USED ON ALL MOVING COMPONENTS AT CONTACT POINTS.  
DOW CORNING #44 GREASE USED ON CYLINDER WAFERS
  - 3) MOUNTING BRACKETS AND MOUNTING SCREWS ARE FURNISHED WITH ZINC FINISH.
  - 4) MAXIMUM TORQUE FOR MOUNTING SCREWS: 35/40 in.lbs.  
5) AVAILABLE KEY NOS: J201 THRU J210, J223 & J236.  
EXAMPLE ORDER P/N: 20-21100 LED-201A-03

LED LIGHT NOTES:  
COLOR: DAYLIGHT (6500k)  
CRI: 80±2  
VIEWING ANGLE: 120°  
INPUT VOLTAGE: 12VDC  
POWER: 0.9W ±5%  
AMP DRAW: 71-79 mA  
LUMINOUS OUTPUT: 100 LUMENS ±5  
OPERATING TEMPERATURE: -20° TO 180°F  
LIFETIME: L70 GREATER THAN 50,000  
STANDARDS: RoHS, MADE WITH UL RECOGNIZED COMPONENTS

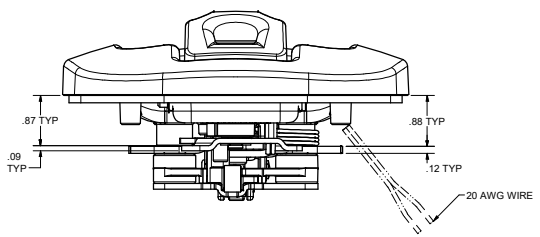

KEY LOCKING/BRACKET STYLE  
KEY NUMBER  
FINISH CODE  
GASKET TYPE

CUSTOMER PRINT  
SHEET 1 OF 3

PART NUMBER	FINISH	X DIM.	GASKET TYPE	MOUNTING HARDWARE
20-21100 LED-XXXX	03, 30, 31, 42, 35	.13	30 DUROMETER EPDM CLOSED CELL SPONGE	20-21100-MHPK
20-21100 LED-XXXB	03, 30, 31, 42, 35	.41	50 DUROMETER ETHYLENE VINYL ACETATE SPONGE	20-21100-MHPK
20-21100 LED-XXXC	03, 30, 31, 42, 35	.06	TPU - MOLDED	20-21100-MHPK

THE DOCUMENT IS UNCONTROLLED WHEN REPRODUCED  
DATE: 11/13/2025

ISSUE NO: 0001  
ISSUE DATE: 09/15/2019

ANGLES: 25 50  
FRAC DEC: + .05 + .02  
FRAC DEC: + .05 + .02  
FRAC DEC: + .05 + .02

LED LOCKING HANDLE ASSEMBLY WITH INSIDE RELEASE, ALTERNATE HOLE LOCATION MOUNTING BRACKETS

20-21100 LED-A CHART

EBERHARD MANUFACTURING CO.  
DIVISION OF  
THE EASTERN COMPANY  
CLEVELAND, OHIO 44116B212