

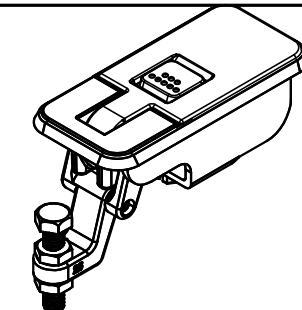


CONFIDENTIAL NOTICE: This drawing and the designs, specifications and engineering information disclosed hereon are the property of Eberhard Manufacturing Company and are not to be disseminated or reproduced without express written consent. The drawing is loaned in confidence and then only for consideration of the matter disclosed hereon. In accepting loan of this drawing, recipient agrees to keep it and the matter disclosed hereon in confidence and not to use nor permit their use in any way detrimental to Eberhard Manufacturing Company, Division of the Eastern Company, 21944 Drake Road, Cleveland, Ohio 44149-9712 © 2018 EBERHARD MFG. CO.

REVISION HISTORY					
REV	DESCRIPTION	EN	DATE	REV BY	APVD BY
-	RELEASED WAS M12167	5849	4/20/2018	VRB	MR
1	REVISED NOTE	5854	5-25-18	FLP	MR
2	ADDED: .35/.0, .39, .44, ADDED CALLOUT	5859	6-29-18	FLP	MR

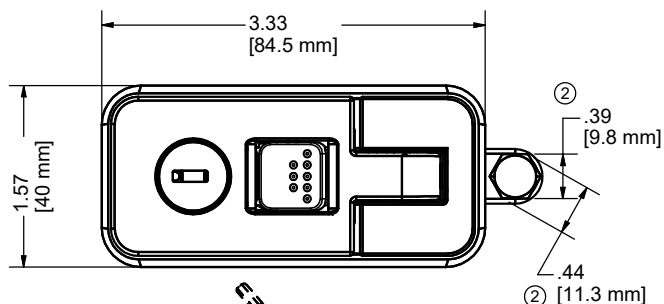


5-734
NON-LOCKING VERSION
SCALE .75

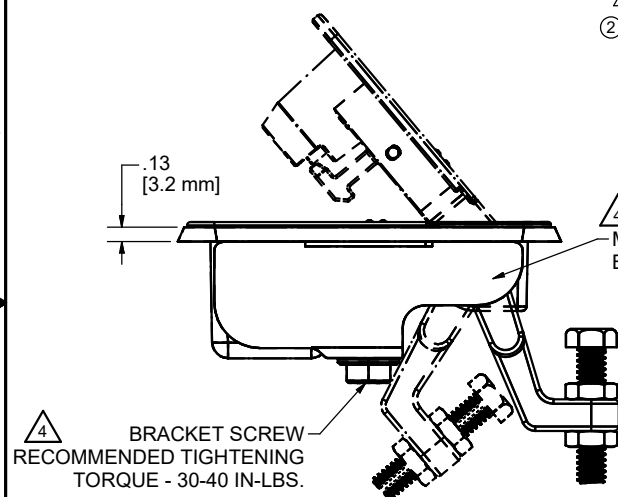


PART NO.	"A"	"B"	"C"	"D"	KEYS
5-734-LL25-K	1.44[36.5mm]	.53[13.5mm]	1.18[30mm]	.59[15mm]	2
5-734	1.44[36.5mm]	.53[13.5mm]	1.18[30mm]	.59[15mm]	N/A

"D" MIN.
GRIP RANGE
"C" MAX.
GRIP RANGE

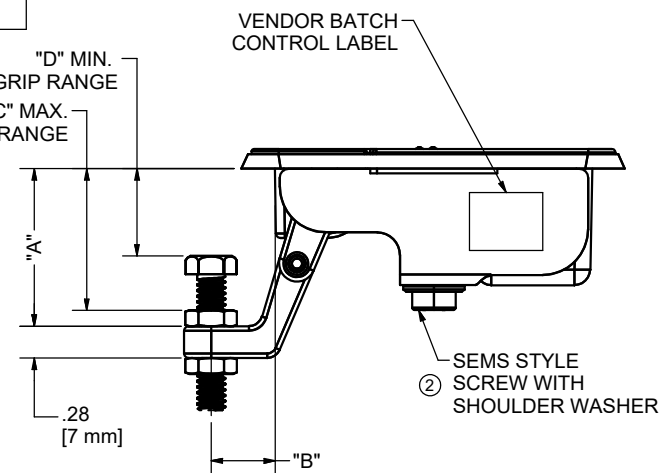

- NOTE:
- 1.) EBERHARD FINISH: (42) BLACK POWDER (TEXTURED)
 - 2.) LOCK KEYED FOR LL25 ONLY, 2 KEYS SUPPLIED.
 - 3.) ALL DIMENSIONS ARE FOR REFERENCE ONLY
- ▲ MOUNTING BRACKET, BRACKET SCREW, GASKET SHIPPED LOOSE IN SECURE POLY BAG, PLACED IN LARGER POLY BAG WITH TRIGGER LATCH.
- ▲ TO ORDER NON-LOCKING VERSION ORDER PART # 5-734.

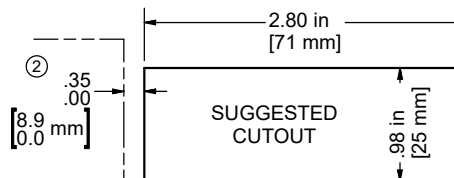

THIS DOCUMENT IS IN ACCORDANCE WITH ASME			
Y14.5-2009			
LINEAR MEASURE: INCH			
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE AS FOLLOWS:			
ANGLES:	± 2'	± 2'	
2 PLACE DEC.:	± .03	± .76	
3 PLACE DEC.:	± .015	± .38	
ALL HOLES:	± .005	± .13	

EBERHARD MANUFACTURING CO.			
DIVISION OF THE EASTERN COMPANY CLEVELAND, OHIO 44149-9712			
NAME		PART NUMBER	
TRIGGER LATCH ASSEMBLIES, LOCKING WITH KEYS AND NON-LOCKING		5-734 CHART	
MATERIAL		CHART	